


### Interfilm Type OA Acrylic Coated, Overlamine Film

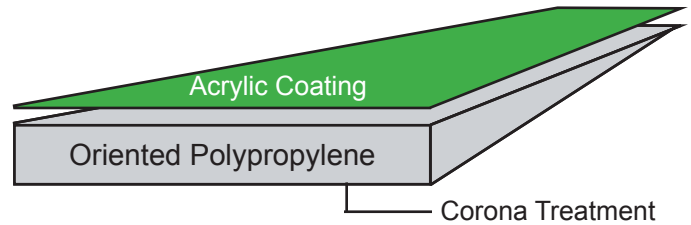

## Product Features

**DESCRIPTION:** Biaxially oriented film, acrylic coated one side and corona treated on the opposite side for bonding to various inks, adhesives and metal.

### FEATURES:

- Excellent Transmission and Gloss
- Metallizable
- Good Machineability
- Excellent Printability
- Good Aroma Barrier
- Embossable

### APPLICATIONS:

- Flexible Packaging Laminations
- Paperboard Overlamination
- Folding Carton Windows
- Paper Laminations
- Embossable Decorative Laminates

Property		Value	Unit	Test Method
<b>Physical Properties</b>				
Thickness		64	gauge	
Yield		48,250	in <sup>2</sup> /lb	
Density		0.91	g/cm <sup>3</sup>	ASTM D 792
Tensile Strength	MD	20,000	PSI	ASTM D 882
	TD	35,500		
Elongation	MD	180	%	ASTM D 882
	TD	70		
COF		0.5		ASTM D 1894
Surface Tension		38	dyne/cm	ASTM D 2578
<b>Thermal Properties</b>				
Shrinkage	MD	3.5	%	150°C x 30 min
	TD	1.5		
<b>Optical Properties</b>				
Haze		1.7	%	ASTM D 1003
Gloss		90	%	ASTM D 2457
<b>Barrier Properties</b>				
WVTR		0.5	g/100in <sup>2</sup> /24 hrs	38C x 100%RH

\* All values +/- 10%

The information and recommendations in this publication are, to the best of our knowledge, reliable. Suggestions made concerning uses or applications are only the opinion of Interfilm Holdings, Inc., and Interfilm Holdings, Inc., makes no warranty of results to be obtained. Users should make their own tests to determine the suitability of these products for their own particular purposes. However, because of the numerous factors affecting results, Interfilm Holdings, Inc., MAKES NO REPRESENTATIONS OF ANY WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING THOSE OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, OR ANY OTHER MATTER WITH RESPECT TO THE MATERIAL OTHER THAN THAT THE MATERIAL CONFORMS TO ITS APPLICABLE CURRENT STANDARD SPECIFICATIONS. Statements herein, therefore, should not be construed as representations or warranties. THE RESPONSIBILITY OF INTERFILM HOLDINGS, INC. FOR CLAIMS ARISING OUT OF BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY OR OTHERWISE IS LIMITED TO THE PURCHASE PRICE OF THE MATERIAL.

## Roll Configurations

Roll OD's and core sizes are customized for each order.  
Please contact your account manager for details.

---

## Available Widths

- Most films are available in roll widths from ¼ inch to 80 inches
- 

## Minimum Order Quantities

- Minimum order quantity is 500 lbs. Freight will be prepaid and added to invoice.
  - Production orders less than 500 lbs. will incur a less than minimum order fee.
  - Orders greater than 1000 lbs. are shipped freight paid.
- 

## Plant Locations

Nationwide service through four plants locations.

