


**Opticite® 620**  
*Clear, Glossy,  
 Corona Treated Film*

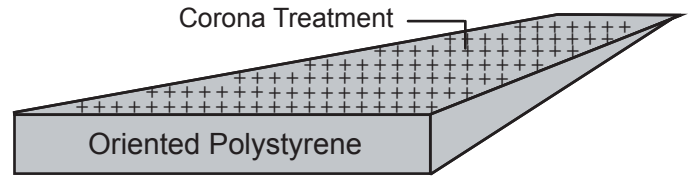

## Product Features

**DESCRIPTION:** A clear, glossy, biaxially oriented, dimensionally stable polystyrene film. It is corona treated with low curl, designed for pressure-sensitive, self adhesive label applications.

### FEATURES:

- Excellent Optics
- Corona Treated
- Low Curl
- Good Dimensional Stability

### APPLICATIONS:

- Pressure Sensitive Labels

Property		Value	Unit	Test Method
<b>Physical Properties</b>				
Thickness		200      250	gauge	
Yield		13,200      10,550	in <sup>2</sup> /lb	ASTM D 4321
Tensile Strength	MD TD	10,500 10,500	PSI	ASTM D 882
Elongation	MD TD	40      52 14      4	%	ASTM D 882
1% Secant Modulus	MD TD	430,000 430,000	PSI	ASTM D 882
Surface Tension	Treated	60	dyne/cm	ASTM D 2578
<b>Optical Properties</b>				
Gloss		165	%	ASTM D 2457
Haze		0.5	%	ASTM D 589

\* All values +/- 10%

Opticite®620 complies with specific requirements associated with direct and indirect food contact, including FDA 21 CFR

Opticite® is a registered trademark of The Dow Chemical Company.

The information and recommendations in this publication are, to the best of our knowledge, reliable. Suggestions made concerning uses or applications are only the opinion of Interfilm Holdings, Inc., and Interfilm Holdings, Inc., makes no warranty of results to be obtained. Users should make their own tests to determine the suitability of these products for their own particular purposes. However, because of the numerous factors affecting results, Interfilm Holdings, Inc., MAKES NO REPRESENTATIONS OF ANY WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING THOSE OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, OR ANY OTHER MATTER WITH RESPECT TO THE MATERIAL OTHER THAN THAT THE MATERIAL CONFORMS TO ITS APPLICABLE CURRENT STANDARD SPECIFICATIONS. Statements herein, therefore, should not be construed as representations or warranties. THE RESPONSIBILITY OF INTERFILM HOLDINGS, INC. FOR CLAIMS ARISING OUT OF BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY OR OTHERWISE IS LIMITED TO THE PURCHASE PRICE OF THE MATERIAL.

## Standard Roll Sizes

Available Core Sizes →	3"	3"
Approximate Roll OD →	13	18
<b>Gauge</b>	<b>Approximate Roll Lengths</b>	
105	9,500	19,000
115	8,500	17,000
125	8,000	16,000
150	6,700	13,400

\*Non-standard roll lengths/OD's are available on special request.

---

## Available Widths

- Most films are available in roll widths from ¼ inch to 80 inches

---

## Minimum Order Quantities

- Minimum order quantity is 500 lbs. Freight will be prepaid and added to invoice.
- Production orders less than 500 lbs. will incur a less than minimum order fee.
- Orders greater than 1000 lbs. are shipped freight paid.

---

## Plant Locations

Nationwide service through four plants locations.

