


Skyrol® Type SW84G
*Opaque White,
 Chemically Treated Film*

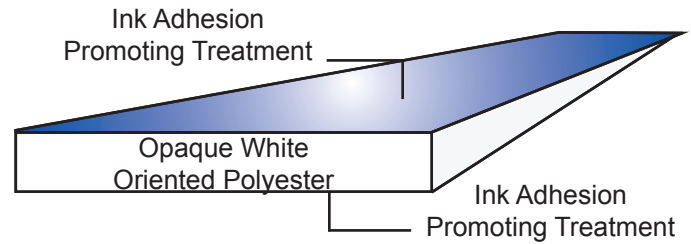

Product Features

DESCRIPTION: An opaque white polyester film with an ink adhesion promoting pretreatment on both sides.

FEATURES:

- Opaque White
- Chemically Treated on Both Sides for Ink Adhesion

APPLICATIONS:

- Labels
- Ink Jet Printing
- Decorations

Property	Value								Unit	Test Method
Physical Properties										
Thickness	92	142	200	300	400	500	700	752	gauge	
Yield	21,524	13,945	9,901	6,601	4,901	3,960	2,870	2,671	in ² /lb	
Tensile Strength	MD	25,600	21,300	21,000	19,900	19,900			PSI	ASTM D 882
	TD	31,200	27,000	28,000	25,600	24,100				
Elongation	MD	125	125	130	115	130	115	110	%	ASTM D 882
	TD	90	80	80	80	80	75	75		
Surface Tension	Treated	38							dyne/cm	ASTM D 2578
Thermal Properties										
Shrinkage	MD	1.5							%	150°C x 30 min
	TD	0.5								
Optical Properties										
Whiteness	115								%	ASTM E 313
Light Transmission	35	30	18	12	10	8	4	3	%	ASTM D 1003
Gloss	57								%	ASTM D 2457

* All values +/- 10%

The information and recommendations in this publication are, to the best of our knowledge, reliable. Suggestions made concerning uses or applications are only the opinion of Interfilm Holdings, Inc., and Interfilm Holdings, Inc., makes no warranty of results to be obtained. Users should make their own tests to determine the suitability of these products for their own particular purposes. However, because of the numerous factors affecting results, Interfilm Holdings, Inc., MAKES NO REPRESENTATIONS OF ANY WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING THOSE OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, OR ANY OTHER MATTER WITH RESPECT TO THE MATERIAL OTHER THAN THAT THE MATERIAL CONFORMS TO ITS APPLICABLE CURRENT STANDARD SPECIFICATIONS. Statements herein, therefore, should not be construed as representations or warranties. THE RESPONSIBILITY OF INTERFILM HOLDINGS, INC. FOR CLAIMS ARISING OUT OF BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY OR OTHERWISE IS LIMITED TO THE PURCHASE PRICE OF THE MATERIAL.

INTERFILM HOLDINGS, INC.

P.O. Box 51128 - Piedmont, SC 29673 - 800-648-4828 - www.interfilm-usa.com

Standard Roll Sizes

Available Core Sizes →		3" or 6"	3" or 6"	3" or 6"	6"	6"	6"
Approximate Roll OD →		9.50	11.00	13.00	18.75	22.00	25.50
Roll Weight Multiplier →		3	4.5	6.0	12	18	24
Gauge	Microns	Approximate Roll Lengths					
48	12	10,000	15,000	20,000	40,000	60,000	80,000
60	15	8,000	12,000	16,000	32,000	48,000	64,000
75	19	6,400	9,600	12,800	25,600	38,400	51,200
92	23	5,217	7,826	10,435	20,870	31,304	41,739
142	36	3,380	5,070	6,761	13,521	20,282	27,042
200	50	2,400	3,600	4,800	9,600	14,400	19,200
300	75	1,600	2,400	3,200	6,400	9,600	12,800
400	100	1,200	1,800	2,400	4,800	7,200	9,600
500	125	960	1,440	1,920	3,840	5,760	7,680
700	175	686	1,029	1,371	2,743	4,114	5,486
1000	250	480	720	960	1,920	2,880	3,840
14000	350	343	514	686	1,371	2,057	2,743

*Non-standard roll lengths/OD's are available on special request.

Roll Weight Estimator = (width of roll in inches) X (Roll Weight Multiplier at desired OD)

Available Widths

- Most films are available in roll widths from ¼ inch to 80 inches

Minimum Order Quantities

- Minimum order quantity is 500 lbs. Freight will be prepaid and added to invoice.
- Production orders less than 500 lbs. will incur a less than minimum order fee.
- Orders greater than 1000 lbs. are shipped freight paid.

Plant Locations

Nationwide service through four plants locations.

